BRUHAT BANGALORE MAHANAGARA PALIKE

Asst.Executive Engineer,
Project Sub Division,

Name of Work :- Construction of RCC Drains & CC Roads at 3rd Main & Adjacent Cross Roads in Ravindra Nagar Ward No.13 **Est Cost:50.00 Lakhs**

ಮುನ್ನುಡಿ

ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ, ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ ವ್ಯಾಪ್ತಿಯ ಮಲ್ಲಸಂದ್ರ ವಾರ್ಡ್ ನಂ.13ರ ಪಾಲಿಕೆ ಸದಸ್ಯರ ಮನವಿ ಮೇರೆಗೆ 2016-17ನೇ ಆಯವ್ಯಯದ ಲೆಕ್ಕಶೀರ್ಷಿಕೆ ಪಿಕೋಡ್ ಪಿ-2178ರ ಪೂಜ್ಯ ಉಪಮಹಾಪೌರರ ಅನುದಾನದಡಿಯಲ್ಲಿ ರೂ.100.00 ಲಕ್ಷಗಳ ಅನುದಾನ ಕೋರಿದ್ದು, ವಾರ್ಡ್ ನಂ.13ರ 2 ಕಾಮಗಾರಿಗಳ ಅಂದಾಜು ಮೊತ್ತ ರೂ.100.00 ಲಕ್ಷಗಳಿಗೆ ಟಿಪ್ಪಣಿ ಸಂಖ್ಯೆ:ಉಮಪೌ/ಕಾಅ/ಟಿ/06/2016-17, ದಿನಾಂಕ:07.02.2017ರ ಪತ್ರದಲ್ಲಿ 2016-17ನೇ ಸಾಲಿನ ಆಯವ್ಯಯದ **"ಪೂಜ್ಯ ಉಪಮಹಾಪೌರರು ಆಜ್ಞೆಮಾಡುವ ವಿಶೇಷ ಕಾಮಗಾರಿಗಳು ಪಿ-2178"** ಲೆಕ್ಕಶೀರ್ಷಿಕೆಯಡಿ ಅನುದಾನ ಮಂಜೂರು ಮಾಡಿ ಕಾಮಗಾರಿ ಅನುಷ್ಠಾನಗೊಳಿಸಲು ಪೂಜ್ಯ ಉಪಮಹಾಪೌರರು ತಮ್ಮ ಪತ್ರದಲ್ಲಿ ಕೋರಿರುತ್ತಾರೆ.

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು, ಯೋಜನ ವಿಭಾಗ ಹಾಗೂ ಮುಖ್ಯ ಅಭಿಯಂತರರು, ದಾಸರಹಳ್ಳಿ ವಲಯ ರವರ ಪ್ರಸ್ತಾವನೆ ದಿನಾಂಕ:07.02.2017ಕ್ಕೆ ಪೂಜ್ಯ ಉಪಮಹಾಪೌರರು ಪತ್ರ ನೀಡಿ, ತೆರಿಗೆ ಮತ್ತು ಆರ್ಥಿಕ ಸ್ಥಾಯಿ ಸಮಿತಿ ಸಭೆಯ ನಡವಳಿಗಳು ವಿಷಯದ ಸಂಖ್ಯೆ:ತೆಆಸ್ಥಾಸ/109/ 2016-17, ದಿನಾಂಕ:09.01.2017ರಲ್ಲಿ 2016-17ನೇ ಸಾಲಿನ ವಿವಿಧ ಲೆಕ್ಕ ಶೀರ್ಷಿಕೆಗಳಲ್ಲಿ ಉಳಿತಾಯವಾಗುವ ಅನುದಾದಲ್ಲಿ ಕೆ.ಎಂ.ಸಿ ಕಾಯ್ದೆ 172ರನ್ವಯ ಲೆಕ್ಕ ಶೀರ್ಷಿಕೆ ಪಿಕೋಡ್ ಪಿ-2178ಗೆ ರೂ.5000.00 ಲಕ್ಷಗಳ ಅನುದಾನವನ್ನು ವರ್ಗಾವಣೆ ಮಾಡಿ ವಾರ್ಡ್ ನಂ.13ರ ವ್ಯಾಪ್ತಿಯಲ್ಲಿ 2 ಅಭಿವೃದ್ಧಿ ಕಾಮಗಾರಿಗಳನ್ನು ಕೈಗೊಳಲು ಲೆಕ್ಕಶೀರ್ಷಿಕೆ ಪಿ-2178ರಡಿ ರೂ.100.00 ಲಕ್ಷಗಳಿಗೆ ಅನುಮೋದನೆಯಾಗಿರುತ್ತದೆ.

ಆದರಂತೆ, ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆಯ ದಾಸರಹಳ್ಳಿ ವಿಧಾನ ಸಭಾ ಕ್ಷೇತ್ರ ವ್ಯಾಪ್ತಿಯ ಮಲ್ಲಸಂದ್ರ ವಾರ್ಡ್ ನಂ.13 ಲೆಕ್ಕಶೀರ್ಷಿಕೆ ಪಿ-2178 ಪೂಜ್ಯ ಉಪಮಹಾಪೌರರ ಅನುದಾನಡಿಯಲ್ಲಿ ಒಟ್ಟಾರೆ 2 ಕಾಮಗಾರಿಗಳಿಗೆ ರೂ.100.00ಲಕ್ಷಗಳು ಅನುಮೋದನೆಯಾಗಿದ್ದು, **"Construction of RCC Drains & CC Roads at 3rd Main & Adjacent Cross Roads in Ravindra Nagar Ward No.13."** ಕಾಮಗಾರಿಗೆ **ರೂ.50.00 ಲಕ್ಷಗಳಿಗೆ ಜಾಬ್ ಸಂಖ್ಯೆ:013-17-000069** ಸಹ ನೀಡಿರುತ್ತಾರೆ.

ಮುಂದುವರೆದು, ಸದರಿ ಕಾಮಗಾರಿಯ ಸ್ಥಳವನ್ನು ವಾರ್ಡ್ ನಂ.13ರ ನಗರ ಪಾಲಿಕೆ ಸದಸ್ಯರು, ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರೊಂದಿಗೆ ಸ್ಥಳ ತಪಾಸಣೆ ಮಾಡಿ, ಮುಖ್ಯ ಅಭಿಯಂತರರು, ದಾಸರಹಳ್ಳಿ ವಲಯ ರವರ ಮಾರ್ಗದರ್ಶನದಂತೆ ಕಾಮಗಾರಿಗೆ ಅತ್ಯಾವಶ್ಯವಿರುವ ಅಂಶಗಳನ್ನು ಅಳವಡಿಸಿಕೊಂಡು ಲೋಕೋಪಯೋಗಿ ಇಲಾಖೆ ಬೆಂಗಳೂರು ವೃತ್ತ 2016-17ನೇ ಸಾಲಿನ ದರ ಪಟ್ಟಿಯಂತೆ ರೂ.50.00 ಲಕ್ಷಗಳಿಗೆ ಈ ಕೆಳಕಂಡ ಅಂಶಗಳನ್ನೊಳಗೊಂಡು ಅಂದಾಜು ಪಟ್ಟಿಯನ್ನು ತಯಾರಿಸಲಾಗಿದೆ.

1. Earth Work Exavation By Manual Means in Ordinary Soil Invoiving
2. Removing B S Slab.
3. Providing and laying in position plain cement concrete of mix 1:4:8.
4. Construction Of granular sub –base.
5. Construction Of dry lean cement concrete mix CC1:5:10.
6. Providing and Laying in Position plain cement concrete Of Mix m20.
7. Providing & Removing Centering, Shuttring, Strutting.
8. Cement concrete pavement with M30 @ 360kg/cum C.A, @ 0.69cum, F.A 0.46 CUM.
9. Providing T.M.T steel reinforcement for R.C.C .
10. Providing groove cutting for width of 5mm to 10mm.
11. Providing & laying reinforeced cement precast slabs

Ravi.N.14

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಯೋಜನ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಯೋಜನ ಉಪವಿಭಾಗ, ದಾಸರಹಳ್ಳಿ ವಲಯ

Bruhath Bangalore Mahanagara Palike Dasarahalli Zone

Name of Work:Construction of RCC Drains & CC Roads at 3rd Main & Adjacent Cross Roads in Ravindra Nagar Ward No.13

					Est .Cost Rs.50.00 Lakhs				
Sl No	**Description of Items**	**Unit**	**No**	**L**	**B**	**D**	**Qty**	**Rate**	**Amount**
1	KSRRB 300-3. Earthwork excavation by manual means in ordinary soil invoiving in average horizontal throw up to 2m & an average lift upto 1.5m , excavated surface leveled & sides neatly dressed , the disposed earth to be levelled neatly after breaking of clods complete as per specification MORTH/ Chapter 3. Page No. 142/ Item No. 19.1/ PWD SR 2016-17								
	5th Cross(3rd Main)	**Cum**	2	68.00	0.90	0.90	110.16		
	6th Cross(3rd Main)		2	65.00	0.90	0.90	105.30		
	7th Cross(3rd Main)		2	64.00	0.90	0.90	103.68		
	8th Cross(3rd Main)		2	93.00	0.90	0.90	150.66		
	3rd Main		1	115.00	5.60	0.45	289.80	175.96	133659.22
				3.00			**759.60**	**172.57**	**131084.17**
2	Removing B S Slab Drain And Stacking Page No25 Item No 5.32 PWD SR 2016-17								
	5th Cross(3rd Main)	**Sqm**	2	68.00	1.35		183.60		
	6th Cross(3rd Main)		2	65.00	1.35		175.50		
	7th Cross(3rd Main)		2	64.00	1.35		172.80		
	8th Cross(3rd Main)		2	93.00	1.35		251.10		
							783.00	**65.72**	**51458.76**
3	KSRB 4-1.3 : Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @ 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @ 0.57cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2 Page No.12/ Item No. 4.3/ PWD SR 2016-17								
	5th Cross(3rd Main)	**Cum**	2	68.00	0.90	0.15	18.36		
	6th Cross(3rd Main)		2	65.00	0.90	0.15	17.55		
	7th Cross(3rd Main)		2	64.00	0.90	0.15	17.28		
	8th Cross(3rd Main)		2	93.00	0.90	0.15	25.11		
							78.30		
	From Using Available coarse aggregates								
a	**Available CA**			**58.73**			**69.09**	**4443.52**	**306994.96**
b	**Remaining Balance Qty**						**9.21**	**5159.02**	**47523.68**
4	KSSRB M400-7 Construction Of granular sub -base by providing coarse graded cushed stone aggregates of granite / trap / basalt material speading in uniform layers with motor grader on prepared surface,mixing by mix in place method with rotavator at OMC,and compacting with vibratory roller to achive the desired density. complete asper specification. **By mix in place method for Grading II Material** KSSRB Page No 156 Item No 20.6 and 20.6.3								
	3rd Main		1	115.00	5.60	0.20	128.80		
							128.80	**1582.58**	**203836.30**

5	KSSRB M600-1 Construction Of **dry lean cement concrete mix CC1:5:10** With OPC cement @160kgs,with 25mm and down size graded granite metal coarse aggregate at 0.86cum and fine aggregates @0.58cum sub-base over a prepared sub-grade with (course and fine aggregate conferming to IS:383) aggregate cement ratio not to exceed 15:1. Aggregate gardation after blending to br as per Table 600-1, cement content not to be less than 160kg/cum, optimum moisture content to be less than 10Mpa at 7days, mixxed in a batching plant, transported to site, laid with a paver with electronic sensor, comacting with 8-10 tonnes vibratory roller,finishing and curing complete asper Specification KSSRB:Page No 176, Item No 22.2 and 22.2.1								
	3rd Main		1	115.00	5.60	0.15	96.60		
							96.60	**3986.66**	**385111.36**
6	KSRB 4-1.5 : Providing and laying in position plain cement concrete of mix M20 with OPC cement @ 300kgs, with 20mm and down size graded granite metal coarse aggregates @0.69cum and fine aggregtes @ 0.43cum, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, plinth and cills, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Page No.12/ Item No. 4.5/ PWD SR 2016-17								
	Drain Rafi Concrete	**Cum**	2	68.00	0.90	0.15	18.36		
			2	65.00	0.90	0.15	17.55		
			2	64.00	0.90	0.15	17.28		
			2	93.00	0.90	0.15	25.11		
	Side Wall		4	68.00	0.15	0.75	30.60		
			4	65.00	0.15	0.75	29.25		
			4	64.00	0.15	0.75	28.80		
			4	93.00	0.15	0.75	41.85		
							208.80	**5874.52**	**1226599.78**
7	KSRB 4-6.4 : Providing and removing centering, shuttering, strutting,. propping etc., and removal of form work for vertical surface such as walls at any thickness, including attached1 pilasters, buttresses, plinth cilis and string courses cost of all materials, labour complete as per specifications. Specification No. KBS 4.6.2 Page No.15/ Item No. 4.31/ PWD SR 2016-17								
		Sqm	8	68.00	0.90		489.60		
			8	65.00	0.90		468.00		
			8	64.00	0.90		460.80		
			8	93.00	0.90		669.60		
							2088.00	**310.58**	**648491.04**
8	Cement concrete pavement. Construction of un-reinforced plain cement concrete pavement, thickness as per design, over a prepared sub base with OPC cement or any other type as per clause 1051.2.2 with 25mm and down size graded granite metal coarse aggregates and fine aggregtes, with superplastisiser @3lts confirming to IS9103-1999 Reaffirmed-2008, mixed in a concrete mixer of not less than 0.6 cum capacity and appropriate weigh batcher as per approved mix design, laid in approved fixed side form work (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the form work as per drawing) & spreading the concrete with shovels, rackers compacted using needle, screed and plate vibrator and finished with floaters in a continuous operation including provision of contraction, expansion, construction and longitudinal joints, including groove cutting charges, joint filler, separation membrane, selant primer, joint sealant, admixtures as approved, including curing, finishing to lines and grades as per drawing complete as per specifications.**M30 (at 360Kg per cum coarse aggregate @ 0.69cum and fine aggregate @ 0.46cum) Page o 177 Item No 22.6.1**								
	3rd Main		1	115.00	5.60	0.15	96.60		
							96.60	**6217.96**	**600654.94**
9	KSRB 4.9.2: Providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications.Specification No. KBS 4.6.3, TMT bars Fe 500. Page No. 17/ Item No. 4.46.2/ PWD SR 2016-17								
	For RCC Drian	Tonnes		**208.80**	x	60kgs	12.53		

						Say	12.53	74331.44	931224.28
10	Providing groove cutting for width of 5mm to 10mm and depth 80mm-100mm including cost of cutting machine, generator & HOM of machinery, including cost of blade,coolant etc., including cleaning of groove & providing sand and hot bitumen fillars, and filler metal etc., including cost of conveyance of all materials, labour, lead and lift charges and all other incidental charges as per drawing and as per specifications. for concrete pavement Page No.178/ Item No.22.8, 22.8.1/ PWD SR 2016-17								
	3rd Main		1	5.00	5.60		28.00		
							28.00	**121.90**	**3413.20**
11	Providing & laying reinforeced cement precast slabs of mix CC 1:11/2:3 using 20mm & down size graded Granite metal using HYSD 10mm dia steel @ 100mm c/c both ways & Complete as per specfications.								
	Missed Slab	**Sqm**	55	0.60		0.90	29.70	28.08	47178.40
			52				**29.70**	**1680.00**	**49896.00**
							28.08		4586141.91
							Sub Total		**4586288.46**
12	**Miscellaneous and Other Charges**							412752.77	**412765.96**
13	**Rounding off**							1105.32	**945.58**
							Grand Total		**5000000.00**
	(Rupees Fifty Lakhs Only)								

CERTIFICATE

1 The Work spot has been inspected and the work found to be necessary
2 The Estimate is prepared as per the PWD SR 2016-17
3 The Provision made in estimate are adequate and essential
4 This area comes under BBMP limits.
5 This work is not included in any other estimate.

Asst Engineer
Project

Asst Executive Engineer
Project Sub-Division
BBMP

Executive Engineer
Project Division
BBMP

ನಂ. JC/02/AS/pr/26/17-18 ದಿನಾಂಕ : 19/5/17
ರೂ. Fifty lacks Rupees only
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಅಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ.
ಜಂಟಿ ಆಯುಕ್ತರು
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ನಂ. CE/TS/19/17-18 ದಿನಾಂಕ : 19/05/2017
ರೂ. Rs. Fifty Lakhs only/-
ಕ್ಕೆ. ಕಿಂತ ಕಡಿಮೆಯಲ್ಲದ ಮೊತ್ತಕ್ಕೆ/-
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ.
ತಾಂತ್ರಿಕ ಸಹಾಯಕರು
ಮುಖ್ಯ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

RATE ANALYSIS

Sl No	Item no & Paze no	Description	Unit	Basic Rate Rs	Area Weightage @ 6%	Total Rs	Remarks
1	I No: 19.1 Page No:142	Exavation For Road Work In All types of soil with hydraulic exavator of .9 cum bucket capacity	Cum	82.00			
	I No: 17.1 Page No:134	Loading And Unloading		68.00			
		Lead For 5 km => 5 x 1.28 x 2.0=12.80 16.00		12.80 16.00		175.96	
			Total	162.80	9.77	172.57	
2	I No: 5.32 Page No:25	Removing B S Slab	Sqm	62.00	3.72	65.72	
3	I No: 4.3 Page No:12	Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement	Cum	4867.00			
	Page No :III	Deduct Rate For Boulder	Cum	-675.00			
a			Total	4192.00	251.52	4443.52	
b	I No:4.3 Page No :12	Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement	Cum	4867.00	292.02	5159.02	
4	I No:20.6.2 Page No:156	Construction of Granular Sub base by providing coarse graded aggrigates Grading II Material	Cum	1493.00	89.58	1582.58	
5	I No:22.1 Page No:176	Construction of dry lean cement Concrete of mix CC 1:5:10	Cum	3761.00	225.66	3986.66	
6	I No:4.5 Page No:12	Providing Laying Plain Cement Concrete of mix M20 with OPC with 20MM Down Size	Cum	5542.00	332.52	5874.52	
7	I No:4.31 Page No:15	Providing And Removing Centring ,Shuttering , Strutting for Vertical Surface	Sqm	293.00	17.58	310.58	
8	I No:22.2.2 Page No:176	Cement concrete pavement. Construction of un-reinforced plain cement concrete pavement design mix M30	Cum	5866.00	351.96	6217.96	
9	I No:~~4.46.3~~ Page No:17	Providing T.M.T steel reinforcement for R.C.C work	Tonne	70124.00	4207.44	74331.44	Revised Rate
10	I No:22.8.1 Page No:178	Providing groove cutting for width of 5mm to 10mm and depth 80mm-100mm	Rmt	115.00	6.90	121.90	
11		Providing & laying reinforeced cement precast slabs of mix CC 1:11/2:3	Sqm	1680.00	–	1680.00	Data Rate

Asst.Engineer,
Project

Asst.Executive Engineer,
Project Sub Division
BBMP, Bangalore.

Executive Engineer,
Project Division,
BBMP, Bangalore.

Name of Work Construction of Rccdrain & cc Roads at 3rd Main and Adjucent cross Roads in Ravindra Nagar in ward No. 13

Carriage way 3 to 4.5m
0.15m Concrete pavement with M40
0.15m Dry lean concrete cc 1:5:10
Existing Concrete Drain
BWSSB trench
Existing old concrete surface
0.2 to 0.25m GSB
Existing concrete drain

Typical c/s of cc Road Surface

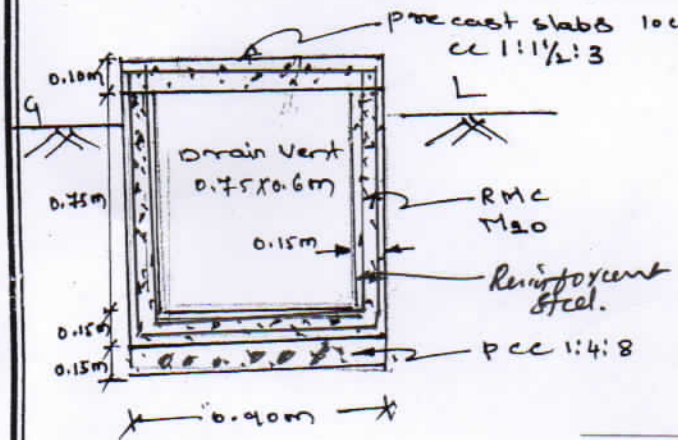

c/s of RCC Drain

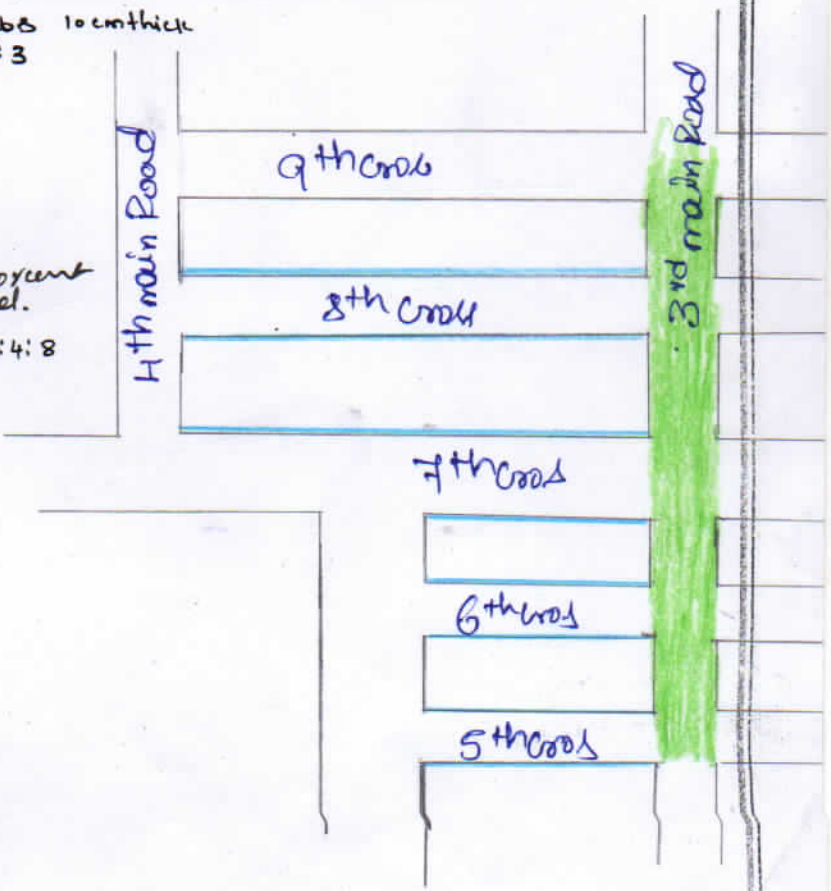

Index -

Rcc Drain -

cc Road -

Asst. Engineer
Project

Asst. Executive Engineer
Project Sub Division, Dasarahalli Zone
BBMP Bangalore.

155 - DASARAHALLI AC

N

BRUHAT BANGALORE MAHANAGARA PALIKE
WARD : 13 - MALLASANDRA

INDEX